

## GUIDE DIN E STAFFE


La gamma include otto modelli disponibili in barre da 2 metri\*: sei di tipo simmetrico, ad "Omega" (di cui tre asolati e tre non forati), due di tipo asimmetrico, a "G" (di cui uno non forato e uno asolato).

Per ciascun modello varia l'altezza ma rimane inalterato l'interasse delle asole presenti sulla parte bassa per il fissaggio. La parte alta invece presenta un foro per il montaggio delle guide DIN.

## DIN RAILS AND RAIL BARS

*Products selection includes eight available models with 2-meter bars\*: six symmetrical models "Omega" (three of which with holes and three without), and two symmetrical models "G-shaped" (one with and one without holes).*

*In each model the height is different but the centre-to-centre distance is the same on the bottom of the bar in order to allow fixing. On the other hand, the top of the bar has a hole to allow DIN rails mounting.*

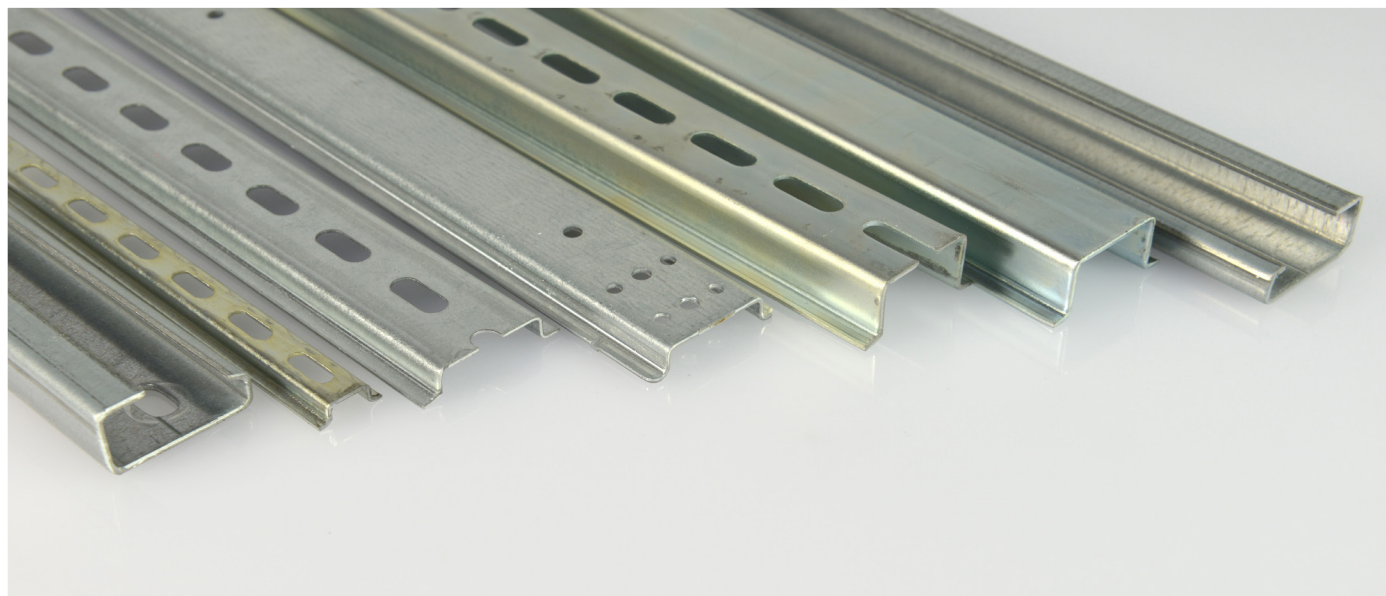

### MATERIALI

- acciaio zincato passivato - guide e staffe

### MATERIALS

- zinc-plated passivated steel - rails and rail bars

### VANTAGGI

- versatilità di applicazione
- installazione rapida con possibilità di regolazione
- gamma disponibile elevata
- resistenza meccanica elevata
- resistenza alla corrosione elevata

### ADVANTAGES

- application flexibility
- fast installation with adjusting possibility
- high product selection available
- high mechanical strength
- high corrosion resistance

### Caratteristiche tecniche


- guide DIN: interasse asole 25 mm
- staffe: interasse di fissaggio 65 mm

### Technical specification


- DIN rails: centre-to-centre hole distance 25 mm
- rail bars: centre-to-centre fixing distance 65 mm

### CERTIFICAZIONI E NORME CERTIFICATIONS AND REGULATIONS


- EN 60715, DIN 46277 per le guide DIN
- DIN1030, DIN 1035, DIN 1120, DIN 1125 per le staffe
- Direttiva RoHS2 2011/65/EU

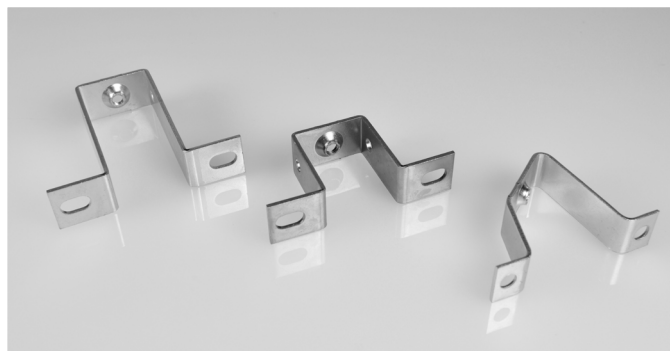


**GD15GN3**




**GD35GN7**




**GD35GNB**




**GD32GNF**




**GD15GF4**




**GD35GF8**

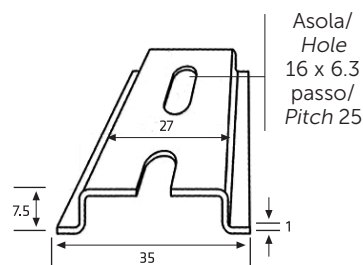

**GD35GFC**



**GD32GNG**




Codice Code	Descrizione Description	Conf. (pz) PHS (pcs)
<b>GD15GN3</b>	guida DIN omega piccola 15 mm. senza fori zincata / DIN rail omega small, 15 mm. without holes, zinc-plated, white	1/20 x 2 m
<b>GD15GF4</b>	guida DIN omega piccola 15 mm. forata zincata / DIN rail omega small, 15 mm. with holes, zinc-plated, white	1/20 x 2 m
<b>GD35GN7</b>	guida DIN omega bassa 35 mm. senza fori zincata / DIN rail omega short, 35 mm. without holes, zinc-plated, white	1/20 x 2 m
<b>GD35GF8</b>	guida DIN omega bassa 35 mm. forata zincata / DIN rail omega short, 35 mm. with holes, zinc-plated, white	1/20 x 2 m
<b>GD35GNB</b>	guida DIN omega alta 35 mm. senza fori zincata / DIN rail omega high, 35 mm. without holes, zinc-plated, white	1/20 x 2 m
<b>GD35GFC</b>	guida DIN omega alta 35 mm. forata zincata / DIN rail omega high, 35 mm. with holes, zinc-plated, white	1/20 x 2 m
<b>GD32GNF</b>	guida DIN a C senza fori zincata / DIN rail C-shaped without holes, zinc-plated, white	1/20 x 2 m
<b>GD32GNG</b>	guida DIN a C forata zincata / DIN rail C-shaped with holes, zinc-plated, white	1/20 x 2 m

\*Su richiesta effettuiamo tagli su misura


\*On request, make custom cuts

**STAFFE - RAIL BARS**


**ST17KL**




**ST19KN**



**ST21KQ**



**ST23KS**



Codice Code	Descrizione Description	Conf. (pz) PHS (pcs)
<b>ST17KL</b>	staffa bassa 20 mm. zincato / short rail bars 20 mm., zinc-plated white	1/100
<b>ST19KN</b>	staffa media 40 mm. zincato / middle rail bars 40 mm., zinc-plated white	1/100
<b>ST21KQ</b>	staffa alta 70 mm. zincato / high rail bars 70 mm., zinc-plated white	1/100
<b>ST23KS</b>	staffa 45° zincato / rail bars 45°, zinc-plated white	1/100